

PILING HAMMERS

DH-15


FEATURES

- Hydraulic, double-acting impact hammer.
- Excavator, MOVAX multi-tool piling leader, piling rig or crane mounted.
- Excavator mounted
 - incorporates a 0.7 m leader
 - standard mounting with pin adapter (tilt +/-15°, no rotation)
 - Available with optional bolt-on-plate mounted rotation device (tilt +/-15°, rotation +/- 60°).
- MOVAX multi-tool piling leader mounted
 - incorporates a 0.7 m leader
- Available with drive caps for a range of different pile sections.
- Controlled with the MOVAX Control System (MCS™)
- Available with the MOVAX Information Management System (MIMS™)



TECHNICAL DATA

		Excavator mounted	Excavator leader-mounted	Piling rig mounted	Crane mounted
Total weight (excl. adapter)					
with tilt device	kg	3500	2800	2800	2800
with tilt+rotation device	kg	3800	N/A	N/A	N/A
Ram weight	kg	1360	1360	1360	1360
Blows per minute	1/min	0-100	0-100	0-100	0-100
Impact energy	kNm	0-15	0-15	0-15	0-15
Drop height	m	0-1,2	0-1,2	0-1,2	0-1,2
Pressure relief set max	bar	350	350	350	350
Operating pressure	bar	150	150	150	150
Oil flow rate	l/min	120	120	120	120
Tilt angle	°	+/-15	N/A	N/A	N/A
Rotation angle	°	+/-60	N/A	N/A	N/A
Total height	mm	3850	3850	4000	4000
Frame width	mm	500	500	500	500
Transport width	mm	1200	1200	1200	1200
Transport depth	mm	1870	1870	1870	1870
Excavator class	t	(20) 23-50	30-50	-	-

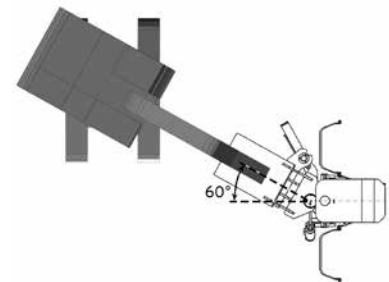

Tilt/rotation device