




Specification sheet

PVE 250M

Vibro Hammer

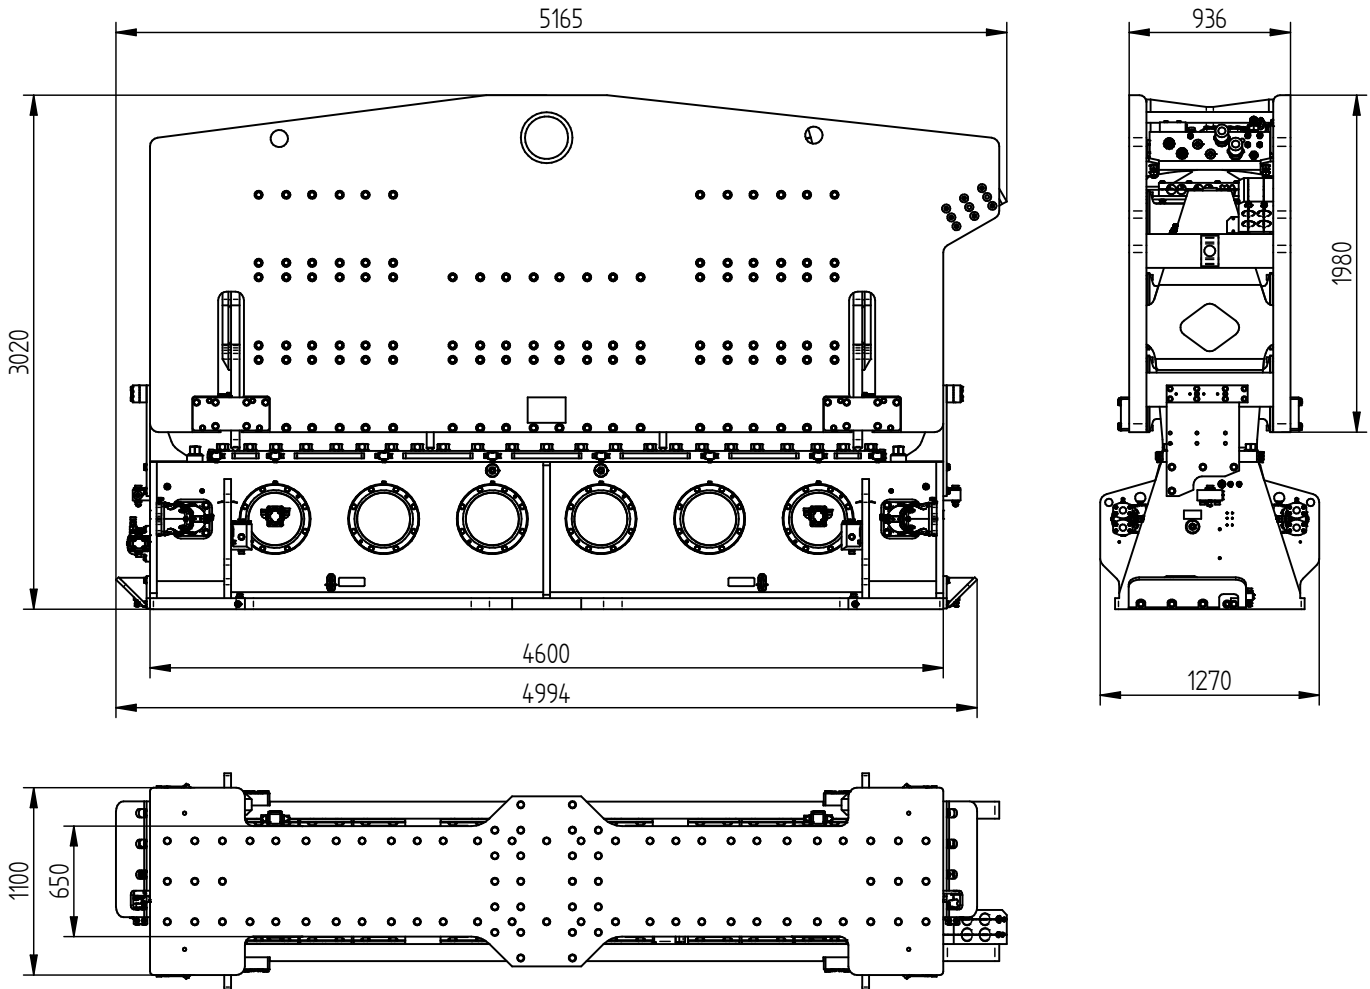

Specifications :

PVE 250M

Eccentric moment	250 kgm	Clamps:	
Centrifugal force	5374 kN	Double clamps	350TC (2x)
Max. frequency	1400 rpm	Transport weight per piece	2980 kg
Max. amplitude excl. 350TC (2x)	24,6 mm		
Max. amplitude incl. 350TC (2x)	18 mm		
Max. static line-pull	3640 kN		
Max. pull-down	200 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	1600 l/min	Model	1600 series
Max. hydraulic power	933/1269 kW/HP		
Forced lubrication	yes		
Dynamic weight excl. 350TC (2x)	20330 kg	Hose set:	
Dynamic weight incl. 350TC (2x)	27740 kg	Length	60 m
Total weight excl. 350TC (2x) & hoses	36500 kg	Transport weight (±)	2760 kg