



WOLTMAN 30 PR

WOLTMAN PILING & DRILLING RIGS

**High capacity, Designed
for multiple jobs per day,
Low weight, Wide tracks**


DIESEKO GROUP

WOLTMAN
PILING & DRILLING RIGS

WOLTMAN 30 PR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

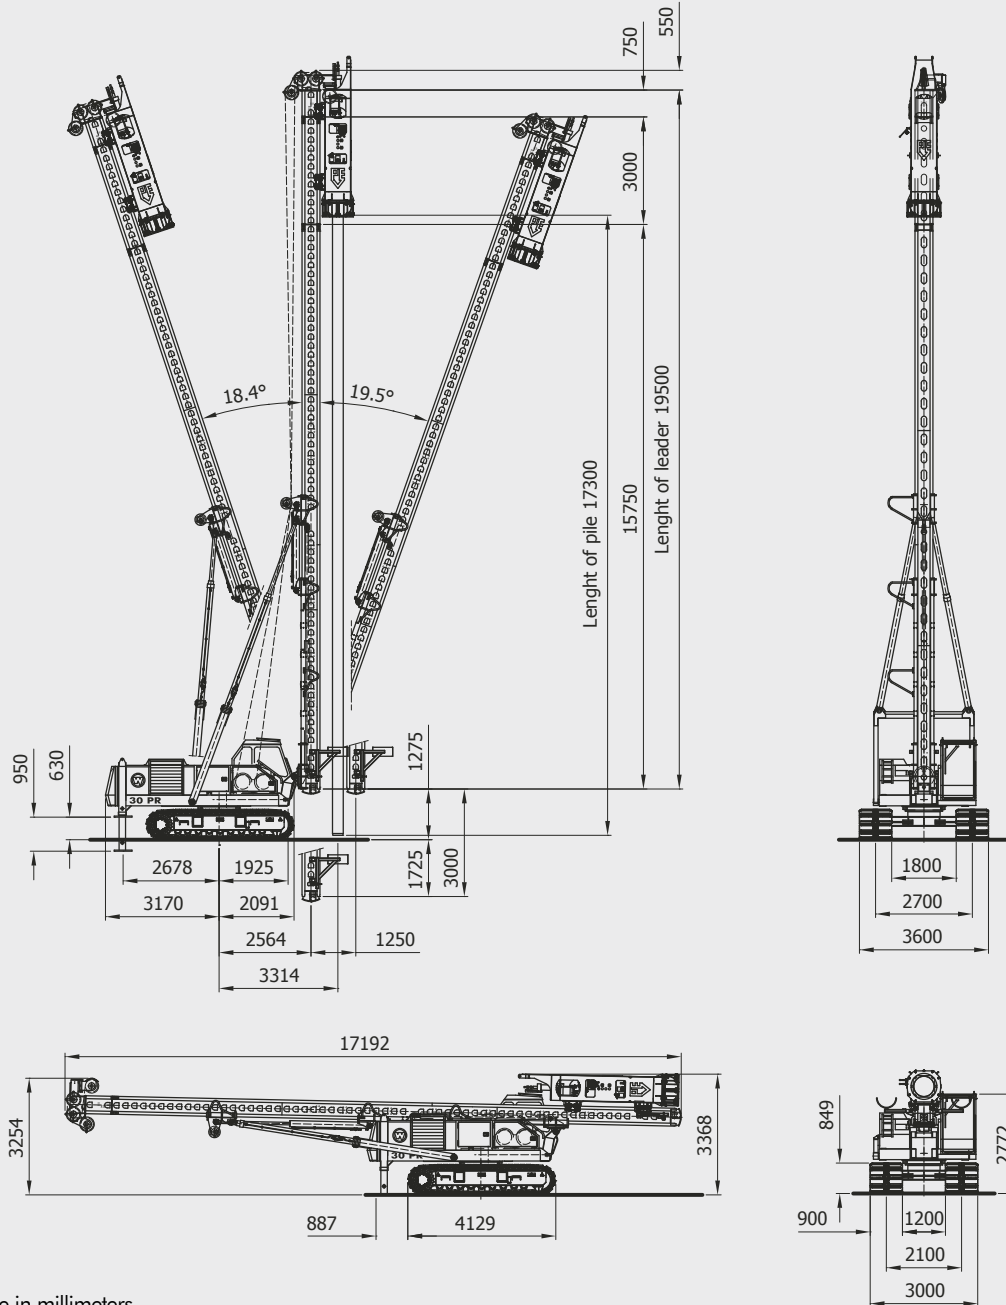

All dimensions are in millimeters

Operational specifications

Recommended hammer size	PVE	3NL-S / 4NL-S		
Max. pile + hammer weight*	ton	10	lbs	22,046
Leader length std. (max.)	mtr	17,5 (19,5)	ft	57.4 (64.0)
Max. pile length (max.)	mtr	15 (17)	ft	49.2 (55.8)
Hammer winch	ton	8	lbs	17,637
Pile winch	ton	6	lbs	13,228
Operational weight incl. 3NL	ton	36	lbs	79,366
Max. oil flow	l/min	260	g/min	69
Max. pressure	bar	320	psi	4,641

Weights

Transport weight excl. hammer	ton	30	lbs	66,139
Transport weight w/o counterweight	ton	27	lbs	59,525
Transport weight incl. PVE 3NL-S	ton	36	lbs	79,366

Rig specifications

Engine	Caterpillar C-7.1			
Engine output	kW	183	HP	250
Hydraulics	Bosch Rexroth			
Hydraulic system	Openloop			

* subject to capacity charts