



WOLTMAN 40 PR

WOLTMAN PILING & DRILLING RIGS

High capacity, Very quick to assemble, *Fast and efficient,*
Very reliable, CAT engine


DIESEKO GROUP

 **WOLTMAN**
PILING & DRILLING RIGS

WOLTMAN 40 PR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

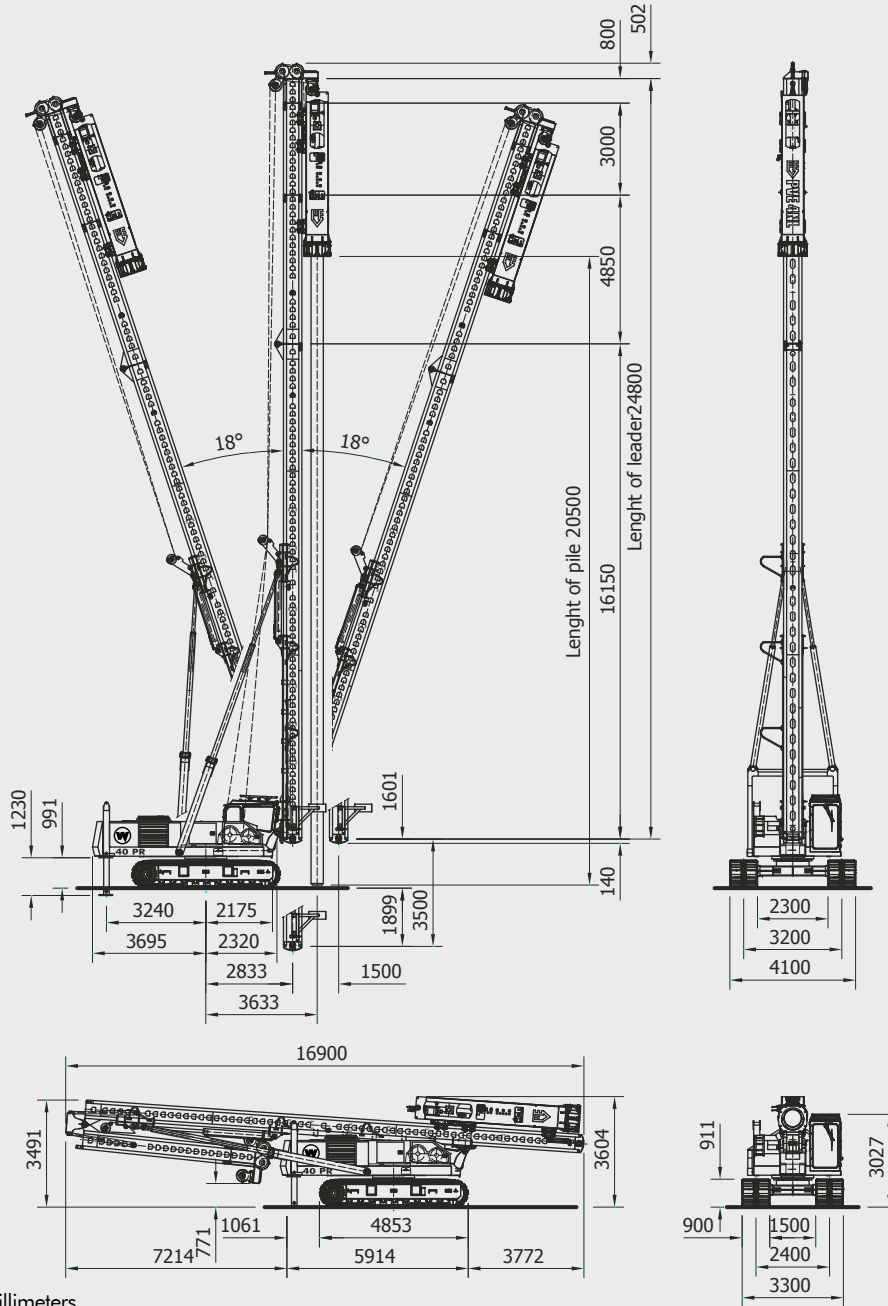

All dimensions are in millimeters

Operational specifications

Recommended hammer size	PVE	4NL/5NL		
Max. pile + hammer weight*	ton	13	lbs	28,660
Leader length std. (max.)	mtr	21,8 (24,8)	ft	71.5 (81.4)
Max. pile length (max.)	mtr	17 (20)	ft	55.8 (65.6)
Hammer winch	ton	10	lbs	22,046
Pile winch	ton	7	lbs	15,432
Operational weight incl. 4NL	ton	48	lbs	105,822
Max. oil flow	l/min	390	g/min	103
Max. pressure	bar	320	psi	4,641

Weights

Transport weight excl. hammer	ton	40	lbs	88,185
Transport weight w/o counterweight	ton	35	lbs	77,162
Transport weight incl. PVE 4NL	ton	48	lbs	105,822

Rig specifications

Engine	Caterpillar C-7.1			
Engine output	kW	183	HP	250
Hydraulics	Bosch Rexroth			
Hydraulic system	Openloop			

* subject to capacity charts