

**WOLTMAN 50 PR**



**WOLTMAN PILING & DRILLING RIGS**

High capacity, **Very quick to assemble** Fast and efficient,  
Very reliable, CAT engine,


**DIESEKO GROUP**

 **WOLTMAN**  
PILING & DRILLING RIGS

# WOLTMAN 50 PR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

## TECHNICAL SPECIFICATIONS

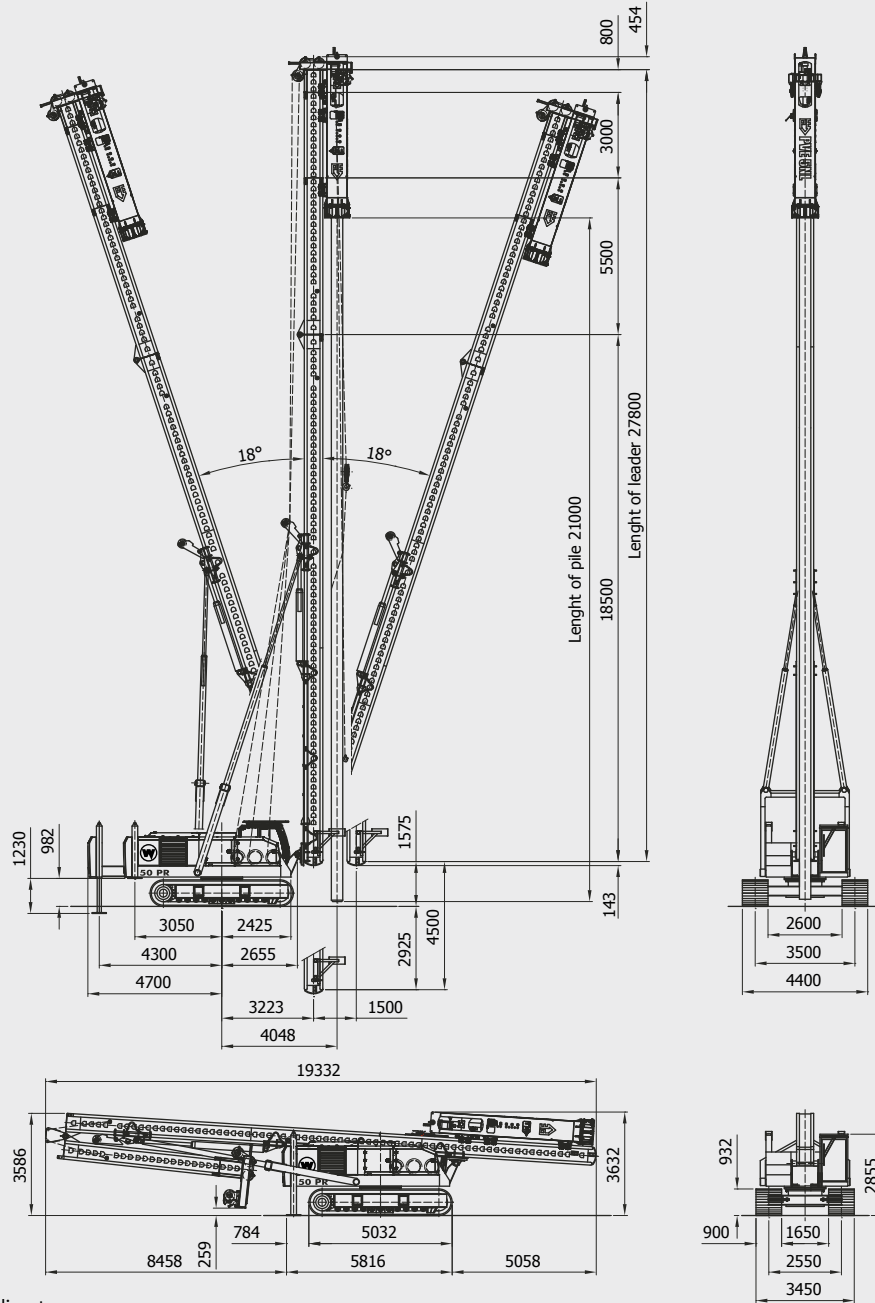

All dimensions are in millimeters

### Operational specifications

Recommended hammer size	PVE	5NL / 6NL / 7NL
Max. pile + hammer weight*	ton	18,5 lbs 40,785
Leader length std. (max.)	mtr	24,8 (27,8) ft 81.4 (91.2)
Max. pile length (max.)	mtr	18 (21) ft 59.1 (68.9)
Hammer winch	ton	12 (6x2) lbs 26,455
Pile winch	ton	12 (6x2) lbs 26,455
Operational weight incl. 5NL	ton	61 lbs 134,482
Max. oil flow	l/min	390 g/min 103
Max. pressure	bar	320 psi 4,641

### Weights

Transport weight excl. hammer	ton	52 lbs 114,640
Transport weight w/o counterweight	ton	45,1 lbs 99,428
Transport weight incl. PVE 5NL	ton	61 lbs 134,482

### Rig specifications

Engine	Caterpillar C-7.1
Engine output	kW 183 HP 250
Hydraulics	Bosch Rexroth
Hydraulic system	Openloop

\* subject to capacity charts

Woltman Piling and Drilling Rigs B.V. Everdenberg 17 4902 TT Oosterhout The Netherlands  
T +31 (0)184 - 425 949 F +31 (0)184 - 424 820 I www.woltmanrigs.com E info@woltmanrigs.com

Member of  
**DIESEKO GROUP**